

Post Screen Series

Create a more Valuable Urban Advertising Media

P Series



Let shop window brighter and more clear, Let customers experience the scenery outside window, and make each store capture every selling point.



P Series Specifications

Size (mm)	1000 x 1500	1000x1750	1000x2000
Model	P3 -A	P3 -B	P3 -C
Pixel Pitch (mm)	3.9 x 7.8	3.9 x 7.8	3.9 x 7.8
Pixel Density (dot/ m ²)	32768	32768	32768
The overall size(mm)	1045x1675x88	1045x1925x88	1045x2175x88
Module Resolution (dot)	256x192	256x224	256x256
LED Type	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1
Brightness (cd/ m ²)	4500	4500	4500
Transparency	82%	82%	82%
Viewing Angle	160°	160°	160°
Grey Level	14bits	14bits	14bits
Scan Mode	1/8	1/8	1/8
Refresh Rate (Hz)	1920	1920	1920
Frame Frequency (Hz)	60	60	60
Avg.Power Consumption(W/ m ²)	300	300	600
Max.Power Consumption(W/ m ²)	600	600	1000
Maintenance	Back	Back	Back
IP	IP42	IP42	IP42
Working Temp	-20~50°C	-20~50°C	-20~50°C
Weight (kg/ pc)	50	60	68

Post Screen Series

Create a more Valuable Urban Advertising Media



Screen Size





1000X1500mm, 1000x1750mm,1000x2000mm

Application Scenarios

Glass wall

Post Screen Series


- Transparency: 85%
- Brightness : 5000cd/m²
- Depth: 37mm
- Viewing Angle: 160°



Other Features

Super(or ultra) transparent

More than 85% transparency, the highest transparency in led screen industry.

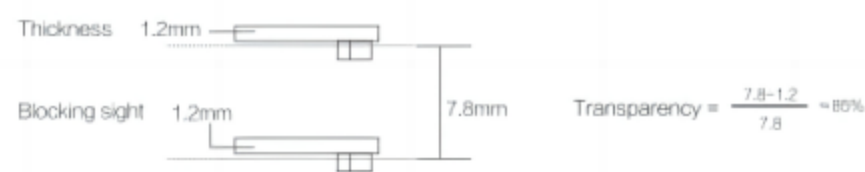

High contrast ratio

High contrast ratio 1500:1, stunning color, dynamic image and eye-catching.



Smart

Smart control by mobile APP, wireless data transmission, screen+data cloud+APP WIFI connection.




Wider advertising Scope

160° viewing angle, eye-catching and wide scope.



Connectivity

- 1 POWER
- 2 LAN
- 3 WIFI
- 4 USB
- 5 CLOUDS
- 6 HEADSET
- 7 RESET
- 8 HDMI

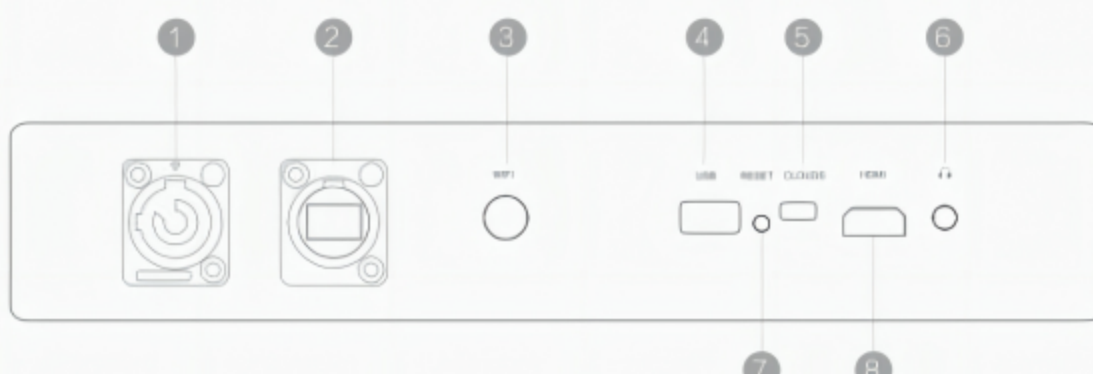

System topology

